



SANREMO

RS   
*Verona*

REALTIME STABILITY

Verona RS



**SANREMO**  
COFFEE MACHINES

**\_ Realtime Stability**

*A sprint of technology*



*made in italy*




**RS GROUP**  
Exclusive Sanremo design that allows an accurate maintenance of the set temperature



# Realtime Stability




*A sprint of technology*

Single group display:

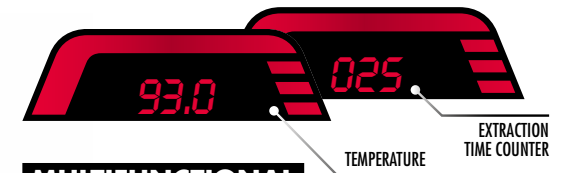

**MULTIFUNCTIONAL DISPLAY**

Touch display:

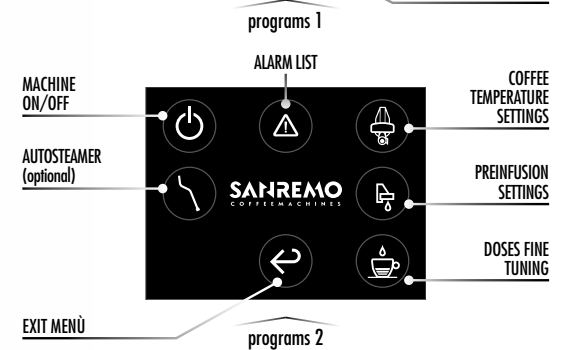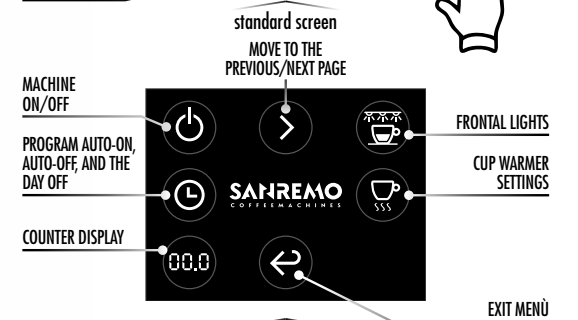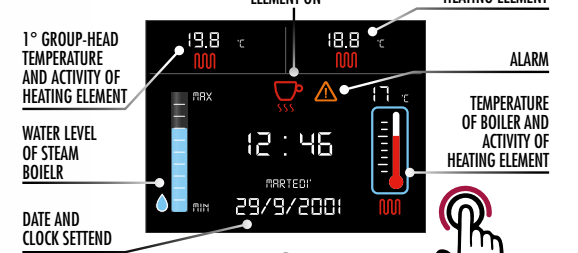

**REALTIME STABILITY**

Constancy in the electronic controlled temperature ( $\pm 0.2^\circ\text{C}$ )



**PRE-INFUSION SYSTEM**

Enabled pre-infusion start&stop for each group



**STAINLESS STEEL "COLD TOUCH"**

Anti-burning feature fitted with "Latte Art" high-performance steam terminals



**Verona RS**  
Download the catalog



**ENERGY SAVING SYSTEM**

Component insulation and smart electronics for maximum energy efficiency

**Characteristics**

- MIXED INFUSION HOT WATER FOR TEA AND HERBAL TEAS**  
Immediate mixing of cold / hot water for a better chemical and organoleptic quality.
- ELECTRONIC AUTO-LEVEL**  
Through an electronic level probe the boiler is automatically filled and maintained to the right filling level.
- STATIC RELAY BOILER TEMPERATURE**  
Allows to regulate the temperature as accurately as possible.
- STAINLESS STEEL COFFEE BOILER**  
Guarantees excellent stability and thermal precision, associated with resistance to oxidation and limestone.
- INDEPENDENT REGULATION TEMPERATURE WATER COFFEE**  
Maximum temperature precision and constancy of distribution.
- PRE-INFUSION SYSTEM**  
Enabled pre-infusion start&stop for each group.
- AISI 316L STAINLESS STEEL STEAM WAND "COOL TOUCH"**  
Anti-burning feature even in conditions of prolonged use, fitted with "Latte Art" high-performance steam terminals.
- PROGRAMMABLE CUP WARMER POWER**  
Electronic programmable cup warmer to keep cups warmed at the right temperature.
- LED LIGHTING OF THE WORK AREA**  
Allows efficient working in any condition of environmental lighting.
- AUTO-ON, AUTO-OFF AND DAY-OFF FUNCTION**  
Programmable on-off timer for each day and/or daily timetables.
- DOUBLE READING GAUGE**  
Allows to control at the same time the boiler pressure and the distribution pressure.


- ENERGY SAVING SYSTEM**  
Component insulation and smart electronics for maximum energy efficiency.
- RS GROUP**  
Exclusive Sanremo design that allows a precise maintenance of the set temperature.
- EASY SERVICE**  
Fast access to the internal parts for quick and easy technical service.
- CLEANING CYCLE**  
Process for coffee groups cleaning.
- HIGH PERFORMANCE VOLUMETRIC PUMP**  
Pressure stability also with prolonged and contemporary use of more than one group.
- COMPETITION FILTERS**  
Exclusive Sanremo design, with shape and volume designed to capture the best coffee aromas and fragrances.
- TEMPCONTROL**  
For a very-high thermal stability ( $\pm 0.2^\circ\text{C}$ ).
- GROUP FLUSHING**  
With a simple pressure of the button a small quantity of water is dispensed to allow the group to be always clean.

- Optional**
- AUTOSTEAMER**  
Steam wand characterized by an electronic system that allows to mount and/or heat milk at the set temperature.
  - EXTERNAL VOLUMETRIC PUMP**
  - HIGH POWER STEAMER TERMINAL (bigger holes diameter)**
  - STAINLESS FILTER HOLDERS**
  - ENHANCED RESISTANCE**







## Versions



32' 2/4" / 820 mm

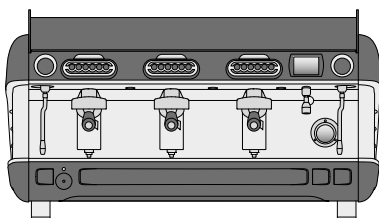

41' 2/4" / 1050 mm

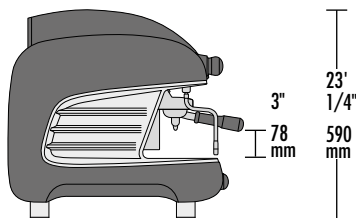

24" / 610 mm


23' 1/4" / 590 mm

### 2 group RS

- 2 steam taps
- 1 water tap
- 1 one-cup filter holder
- 2 two-cup filter holders

### 3 group RS

- 2 steam taps
- 1 water tap
- 1 one-cup filter holder
- 3 two-cup filter holders

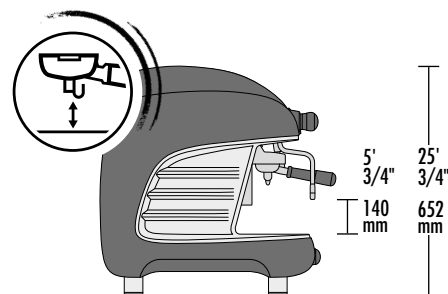

25' 3/4" / 652 mm

### TALL VERSION



## Technical data


		2 group	3 group
voltage	V	220-240 1N	380-415 3N
power input	kW	5.3	6
steam boiler capacity	lt	8.6	10
steam boiler power	kW	3.5	3.5
pump power	kW	0.2	0.2
RS boiler capacity	lt	1	1.5
RS boiler element power	kW	1	1.5
cup-heater power	kW	0.20	0.25
net weight	lb / kg	150 / 68	187 / 85
gross weight (with shipping crate)	lb / kg	163 / 74	200 / 91

## Colours

	Black	RAL 9005
	White	RAL 1013
	Red	RAL 3011


## Tempcontrol

### Multiboiler System

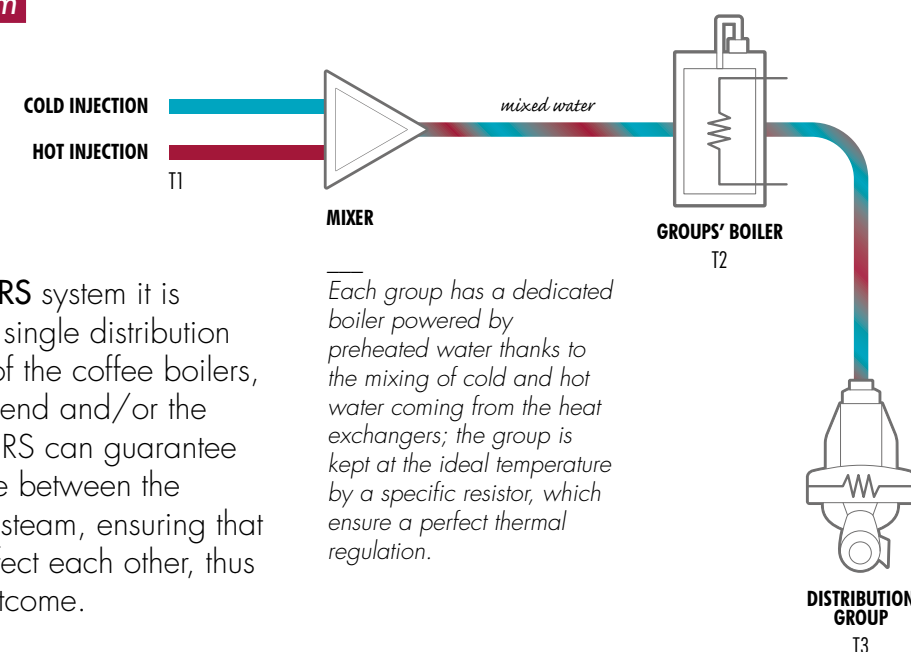

Thanks to the **Multiboiler RS** system it is possible to set – for each single distribution group – the temperature of the coffee boilers, in accordance with the blend and/or the single-origin coffee used. RS can guarantee a complete independence between the distribution of coffee and steam, ensuring that the two actions do not affect each other, thus compromising a good outcome.


Each group has a dedicated boiler powered by preheated water thanks to the mixing of cold and hot water coming from the heat exchangers; the group is kept at the ideal temperature by a specific resistor, which ensure a perfect thermal regulation.

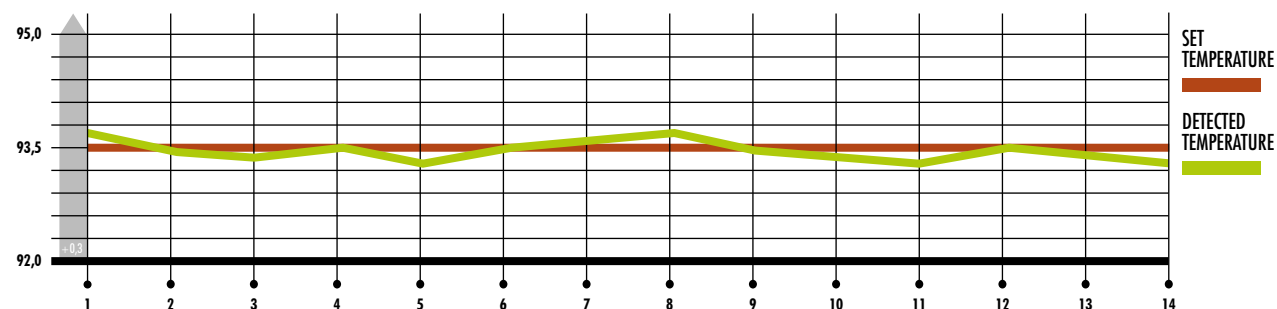

The electronic control unit is equipped with a PID temperature management system, which independently regulates the coffee boilers and the heating of the individual groups.

Thanks to this system, a very high level of thermal stability is guaranteed, with a calibrated variation of  $\pm 0,2^{\circ}\text{C}$  for a perfect extraction of coffee.

## Pre-infusioni

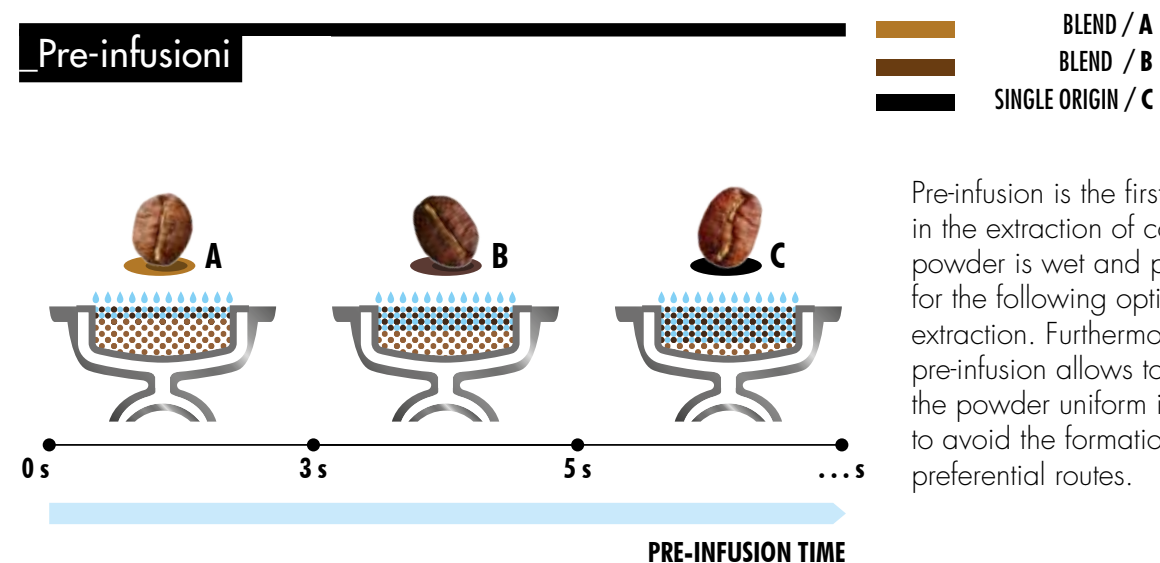

Pre-infusion is the first phase in the extraction of coffee: the powder is wet and prepared for the following optimal extraction. Furthermore, pre-infusion allows to make the powder uniform in order to avoid the formation of preferential routes.

---

For more information about our  
coffee machines please contact us  
at [export@sanremomachines.com](mailto:export@sanremomachines.com)



**SANREMO**  
COFFEE MACHINES

SANREMO coffee machines s.r.l.  
Via Giacomo Bortolan 52  
31050 Vascon di Carbonera [TV] – ITALY  
T +39 0422 448900  
F +39 0422 448935  
[www.sanremomachines.com](http://www.sanremomachines.com)

Sanremo Coffee Machines s.r.l. has a certified Quality Management System  
according to UNI EN ISO 9001:2015 standard.



RoHS